

NPN General Purpose Transistor

FEATURES

- Low reverse current, high reliability
- Surface device type mounting
- Moisture sensitivity level 1
- Matte Tin(Sn) lead finish with Nickel(Ni) underplate
- High temperature soldering guaranteed : 260°C/10s
- RoHS Compliant
- Halogen-free according to IEC 61249-2-21

APPLICATIONS

- General-purpose switching and amplification


MECHANICAL DATA

- Case: SOT-323
- Terminal: Matte tin plated, lead free., solderable per MIL-STD-202, Method 208 guaranteed
- Weight: 5.00mg (approximately)

KEY PARAMETERS		
PARAMETER	VALUE	UNIT
I_C	0.1	A
V_{CBO}	30 - 80	V
V_{CEO}	30 - 65	V
V_{EBO}	5 - 6	V
$T_{J\ MAX}$	150	°C
Package	SOT-323	



SOT-323



ABSOLUTE MAXIMUM RATINGS ($T_A = 25^\circ\text{C}$ unless otherwise noted)			
PARAMETER	SYMBOL	VALUE	UNIT
Power Dissipation	P_D	200	mW
Collector Current	I_C	0.1	A
Peak Collector Current	I_{CM}	0.2	A
Junction temperature range	T_J	-55 to +150	°C
Storage temperature range	T_{STG}	-55 to +150	°C

ELECTRICAL SPECIFICATIONS ($T_A = 25^\circ\text{C}$ unless otherwise noted)						
PARAMETER		CONDITIONS	SYMBOL	MIN	MAX	UNIT
Collector-Base Breakdown Voltage	BC846AW/BW/CW	$I_C = 10\mu\text{A}$	V_{CBO}	80	-	V
	BC847AW/BW/CW			50	-	V
	BC848AW/BW/CW			30	-	V
	BC849AW/BW/CW			30	-	V
	BC850AW/BW/CW			50	-	V
Collector-Emitter Breakdown Voltage	BC846AW/BW/CW	$I_C = 10\text{mA}$	$V_{(BR)CEO}$	65	-	V
	BC847AW/BW/CW			45	-	V
	BC848AW/BW/CW			30	-	V
	BC849AW/BW/CW			30	-	V
	BC850AW/BW/CW			45	-	V
Emitter-Base Breakdown Voltage	BC846AW/BW/CW	$I_E = 1\mu\text{A}$	V_{EBO}	6	-	V
	BC847AW/BW/CW			6	-	V
	BC848AW/BW/CW			5	-	V
	BC849AW/BW/CW			5	-	V
	BC850AW/BW/CW			5	-	V
Collector Cut-off Current		$V_{CB} = 30\text{V}$	I_{CBO}	-	15	nA
Emitter Cut-off Current		$V_{EB} = 5\text{V}$	I_{EBO}	-	100	nA
DC Current Gain	BC846AW - BC850AW	$V_{CE} = 5\text{V}, I_C = 2\text{mA}$	h_{FE}	110	220	-
	BC846BW - BC850BW			200	450	-
	BC846CW - BC850CW			420	800	-
Collector-Emitter Saturation Voltage		$I_C = 10\text{mA}, I_B = 0.5\text{mA}$	$V_{CE(sat)}$	-	0.25	V
		$I_C = 100\text{mA}, I_B = 5\text{mA}$		-	0.60	V
Transition Frequency		$V_{CE} = 5\text{V}, I_C = 10\text{mA}, f = 100\text{MHz}$	f_T	100	-	MHz
Base Emitter Voltage		$V_{CE} = 5\text{V}, I_C = 2\text{mA}$	V_{BE}	0.58	0.70	V
		$V_{CE} = 5\text{V}, I_C = 10\text{mA}$		-	0.77	V
Collector Output Capacitance		$V_{CB} = 10\text{V}, I_E = 0, f = 1\text{MHz}$	C_{ob}	-	4.50	pF

ORDERING AND MARKING INFORMATION			
ORDERING CODE	MARKING	PACKAGE	PACKING
BC846AW RFG	1A	SOT-323	3K / 7" Reel
BC846BW RFG	1B	SOT-323	3K / 7" Reel
BC846CW RFG	1C	SOT-323	3K / 7" Reel
BC847AW RFG	1E	SOT-323	3K / 7" Reel
BC847BW RFG	1F	SOT-323	3K / 7" Reel
BC847CW RFG	1G	SOT-323	3K / 7" Reel
BC848AW RFG	1E	SOT-323	3K / 7" Reel
BC848BW RFG	1F	SOT-323	3K / 7" Reel
BC848CW RFG	1G	SOT-323	3K / 7" Reel
BC849AW RFG	1E	SOT-323	3K / 7" Reel
BC849BW RFG	1F	SOT-323	3K / 7" Reel
BC849CW RFG	1G	SOT-323	3K / 7" Reel
BC850AW RFG	1E	SOT-323	3K / 7" Reel
BC850BW RFG	1F	SOT-323	3K / 7" Reel
BC850CW RFG	1G	SOT-323	3K / 7" Reel
BC846AW RF	1A	SOT-323	3K / 7" Reel
BC846BW RF	1B	SOT-323	3K / 7" Reel
BC846CW RF	1C	SOT-323	3K / 7" Reel
BC847AW RF	1E	SOT-323	3K / 7" Reel
BC847BW RF	1F	SOT-323	3K / 7" Reel
BC847CW RF	1G	SOT-323	3K / 7" Reel
BC848AW RF	1E	SOT-323	3K / 7" Reel
BC848BW RF	1F	SOT-323	3K / 7" Reel
BC848CW RF	1G	SOT-323	3K / 7" Reel
BC849AW RF	1E	SOT-323	3K / 7" Reel
BC849BW RF	1F	SOT-323	3K / 7" Reel
BC849CW RF	1G	SOT-323	3K / 7" Reel
BC850AW RF	1E	SOT-323	3K / 7" Reel
BC850BW RF	1F	SOT-323	3K / 7" Reel
BC850CW RF	1G	SOT-323	3K / 7" Reel

Notes:

1. "G" means green compound (halogen free)

CHARACTERISTICS CURVES

($T_A = 25^\circ\text{C}$ unless otherwise noted)

Fig.1 Normalized DC Current Gain

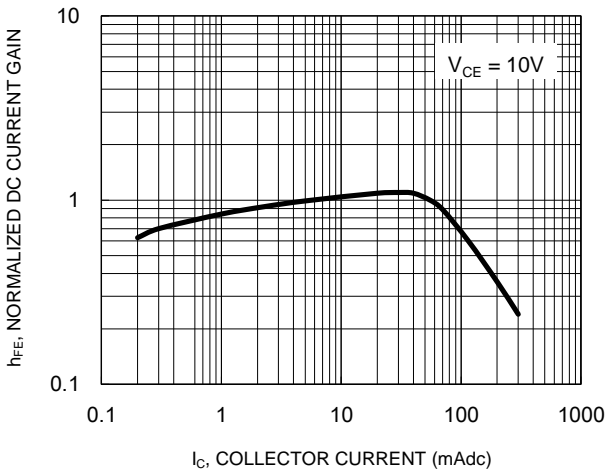


Fig.2 "Saturation" and "On" Voltages

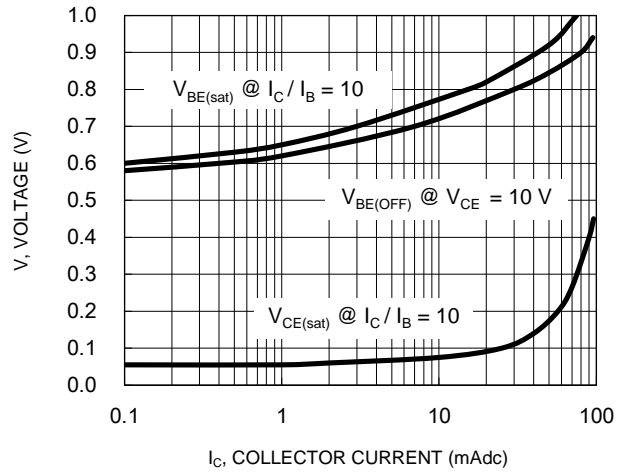


Fig.3 Collector Saturation Region

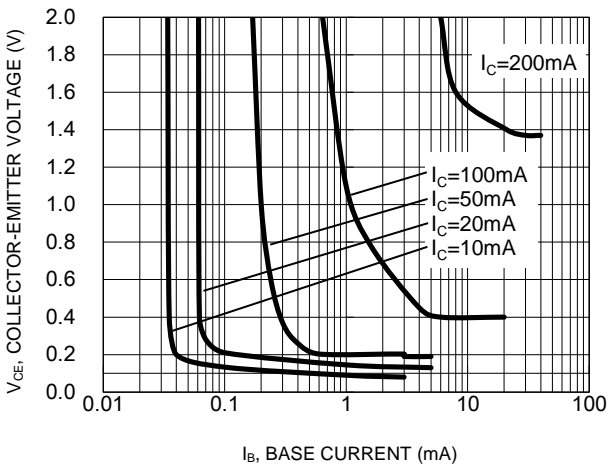


Fig.4 Base-Emitter Current (mA)

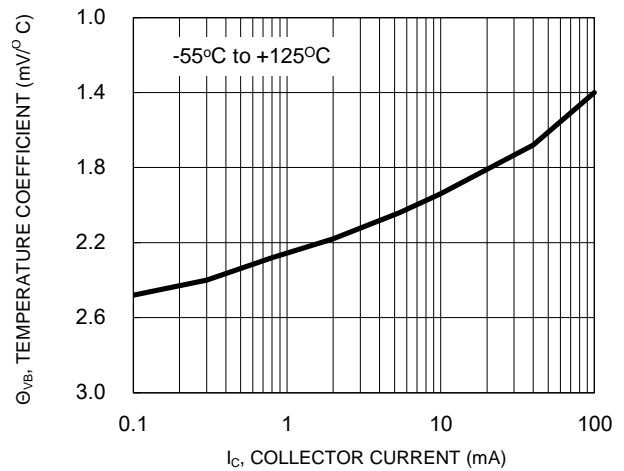


Fig.5 Capacitances


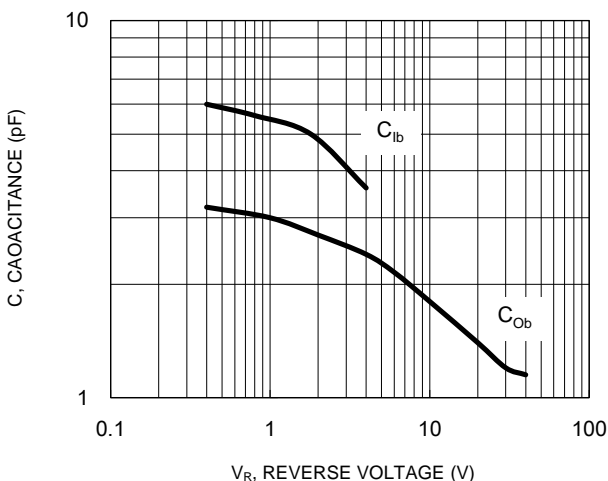


Fig.6 Current-Gain-Bandwidth Product

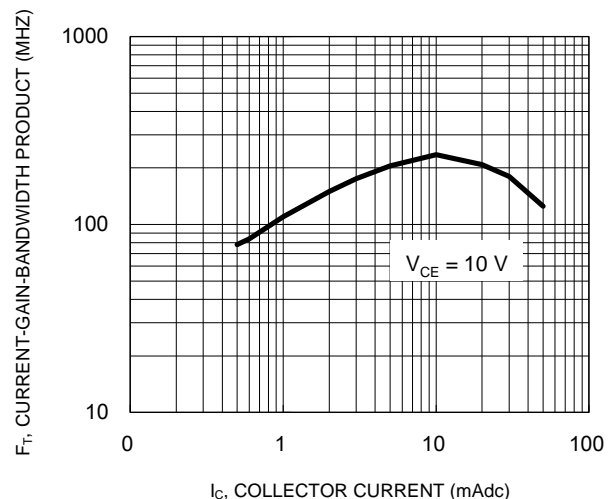

CHARACTERISTICS CURVES

($T_A = 25^\circ\text{C}$ unless otherwise noted)

Fig.7 DC Collector Current (mA)

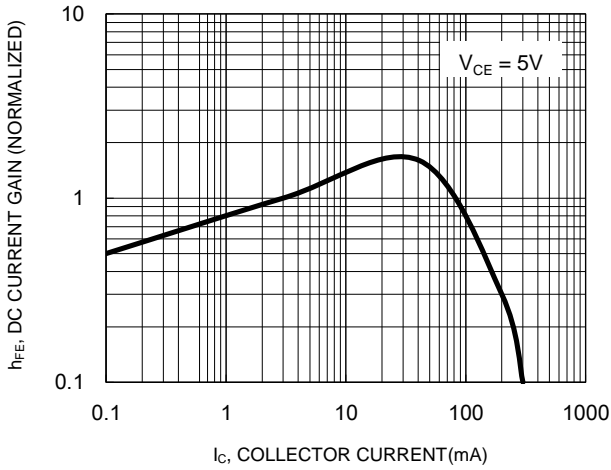


Fig.8 "On" Voltage

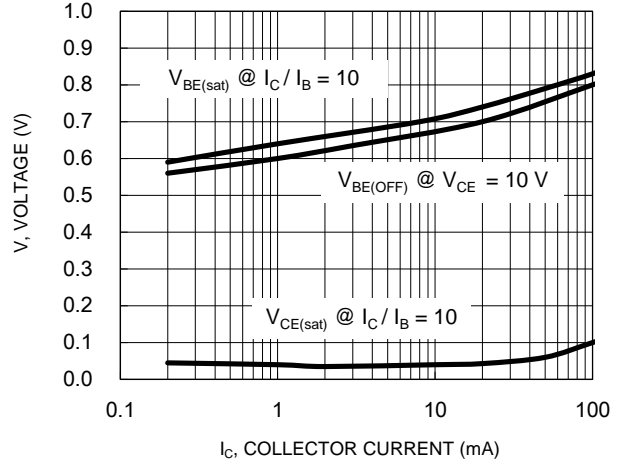


Fig.9 Collector Saturation Region

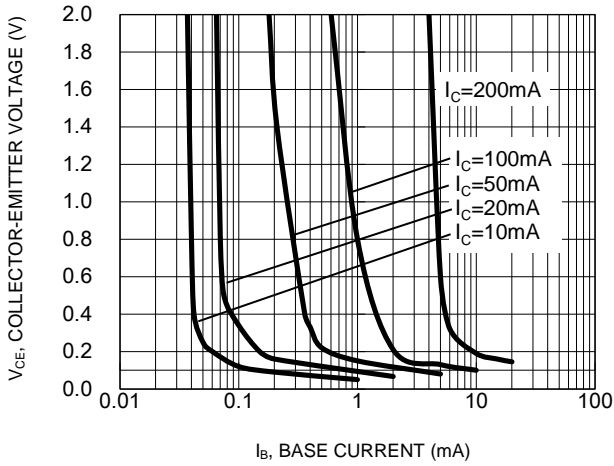


Fig.10 Base-Emitter Temperature Coefficient

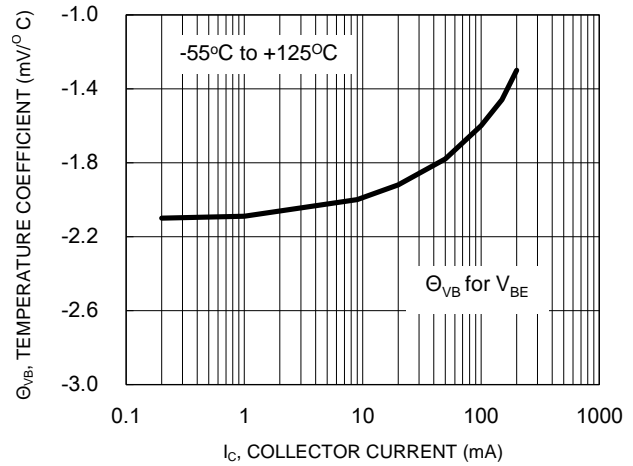


Fig.11 Capacitance



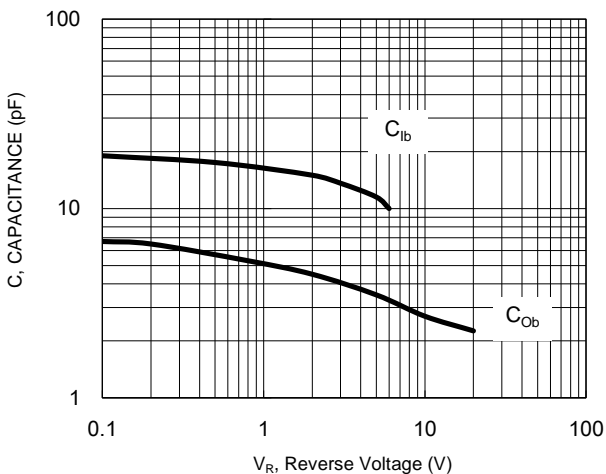


Fig.12 Current-Gain-Bandwidth Product

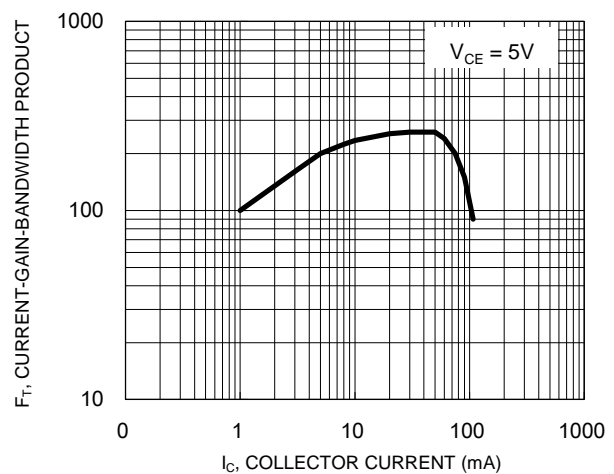


PACKAGE OUTLINE DIMENSIONS

SOT-323

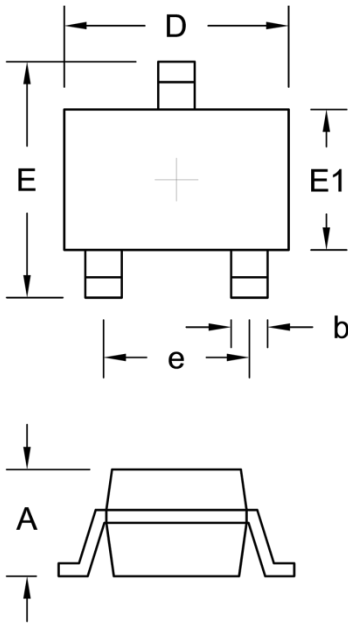

DIM.	Unit (mm)		Unit (inch)	
	Min.	Max.	Min.	Max.
A	0.80	1.10	0.031	0.043
b	0.25	0.40	0.010	0.016
D	1.80	2.20	0.071	0.087
E	1.80	2.40	0.071	0.094
E1	1.15	1.35	0.045	0.053
e	1.30 (TYP)		0.051 (TYP)	

SUGGESTED PAD LAYOUT

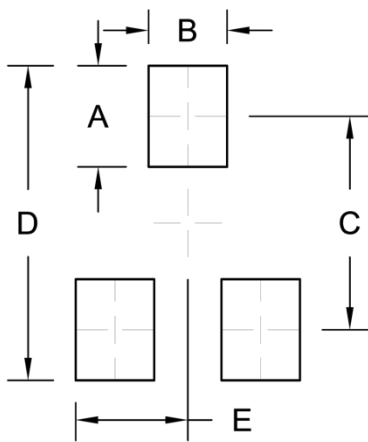

Symbol	Unit (mm)	Unit (inch)
A	0.90	0.035
B	0.70	0.028
C	1.90	0.075
D	2.80	0.110
E	1.00	0.039

Notice

Specifications of the products displayed herein are subject to change without notice. TSC or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Purchasers are solely responsible for the choice, selection, and use of TSC products and TSC assumes no liability for application assistance or the design of Purchasers' products.

Information contained herein is intended to provide a product description only. No license, express or implied, to any intellectual property rights is granted by this document. Except as provided in TSC's terms and conditions of sale for such products, TSC assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of TSC products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify TSC for any damages resulting from such improper use or sale.